
=Parker		
<u>Home</u>		
Products		
<u>Support</u>		
Industries		
<u>Services</u>		
Solutions		
Where to Buy		

Home / Products / Filters, Collecto... / Filter Assemblies... / Hydraulic Filters / Medium Pressure I... / 40CN210QBT1KG202S15

Medium Pressure Inline Filters CN Series

Part #: 40CN210QBT1KG202S15

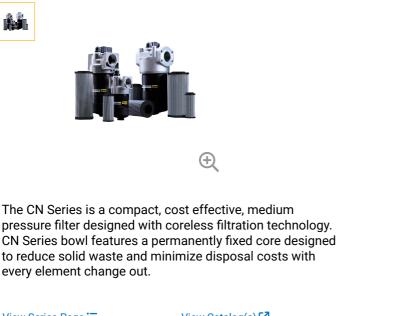

View Series Page ⋮Ξ

View Catalog(s) 🗹

Share / Email 🔿

Print 🖶

Technical Specifications

Division: Product Type: Flow Rate: Filter Element Type: Seal Material: Port Connection Type: Specifications Met: A Safety Warning Hydraulic & Industrial Process Filtration Division EMEA Hydraulic Filter 240 I/min (63 gal/min) 10Q Microglass Nitrile G1¼" CE marked indicator Bypass Valve Pressure Rating: Options: Micron Rating: Indicator Type: Indicator Pressure Setting:

No bypass

No drain 10 μm Electrical indicator with 7/8-14UNF-2A thread, Delphi connector

2.5 bar

Item Information

Compressor Lube Oil Off-line Filter Loops Machine Tools (Automotive Standard) Hydrostatic Drive Charge Pumps Mobile Equipment Pilot Lines for Servo Controls Oil Patch Drilling Equipment Injection Molding

This partial list of applications for Parker CN series filters has a common factor, the need for an economical, medium pressure range filter with excellent fatigue pressure ratings. Prior to the availability of the CN filter, applications such as those listed were restricted by limitations of a spinon can, or forced into the higher cost range of high pressure filters.

The CN series fills this gap, and now with the newly increased fatigue rating from 550 to 800 psi, the applications are expanded.

Features

- \cdot 800 psi fatigue rating (eight times that of a spin-on)
- · Diametral (side) seal between head and bowl
- · Dust Seal
- · Cast aluminum head
- Standard Microglass elements
- · Complete performance data disclosure
- · Visual, electrical or electrical/visual indicators available

Advantages

- · Ability to provide reliable service under tough cyclic operating conditions
- · Can be utilized in applications where high pressure filters may have been only option
- · Proven reliability in cyclic applications
- · Reduced importance of bowl torque
- · Prevents contamination from building up on bowl / head threads
- · Low profile, lightweight and durable
- · Multi-layered design produced high capacity and efficiency
- · Reduces pleat bunching, keeps performance consistent
- \cdot All pertinent information is provided in an easy-to-compare format
- · Check element condition at a glance
- Right style for the application

Benefits

- · Reduced downtime due to premature filter failures
- · Reduced costs, better "fit" for the application
- · No downtime, no leaks
- · Performs with "real world" service
- · Easier service, no galling
- \cdot Less weight, smaller envelop and cleaner appearance
- \cdot Great performance value
- \cdot Reliable performance throughout element life
- \cdot Reduces downtime, maximizes element life
- · No hidden deficiencies
- \cdot Easy selection of proper filtration
- · Optimize element life, prevent bypassing
- · Matches your system electrical connections

CAD Drawings + Files

Related Documents



Parker Sales Company UK

psc.uk.webform@support.parker.com +44 (0)1926 317878

- + Company Information
- + Global Operations
- + Help & Support
- + Follow Us :

© PARKER HANNIFIN CORP 2024

ENGINEERING YOUR SUCCESS. SITE MAP SAFETY PRIVACY POLICIES TERMS AND CONDITIONS