



 \bigcirc

Home

Products

Support

Industries oducts / Filters, Collecto... / Filter Assemblies... / Hydraulic Filters / High Pressure In-... / 70B410QHBPXX322

SHIGH Pressure In-Line Filter - 70/70 Eco Series

Solutions

Part #: 70B410QHBPXX322 Where to Buy







High pressure inline hydraulic oil filter series is a proven filter concept, with multiple connection options up to 500l/min and pressures up to 420 bar.

View Series Page

Share / Email

Print

Pr

Technical Specifications

Flow Rate: 0 to 480 l/min

Division: Hydraulic and Industrial Process Filtration EMEA

Parker Brand:

Indicator Pressure No indicator

Setting:

Technology: Filtration Seal Material: Nitrile

Bypass Valve Pressure

No by pass Rating:

Product Series:

70/70 Eco Series

Mining Material handling

Construction

Marine

Power Generation

Industrial Machinery

Injection Moulding

Connection Type: Side manifold

No by pass

Construction:

Materials of

Operating Pressure:

Operating Temperature:

For Fluid Type:

Application:

Cast iron (GSI).

Steel. Max torque 40 Nm.

and some synthetic oils

Drilling machines Dumpers

Mobile cranes

Reach stackers

Cranes

Excavators

Hydraulic power units

Crushing machines Propulsion systems

Deck machinery

Wind turbines

Servo controls

-40°C to +100°C

Hydropower

350 bar

Head:

Container handling equipment

Suitable for use with mineral and vegetable oils,

▲ Safety Warning

Industry:


Options:

Item Information

The 70/70 Eco Series of high pressure filters are designed to satisfy demanding applications in the mobile and industrial markets. With multiple mounting options, this high pressure filter series is right filter for many applications. The 70/70 Eco Series filter series has a wide range of high capacity and low initial differential pressure elements, including a no metal content Eco element, offering excellent protection to system components.

The 70/70 Eco Serie offers several bowl lengths to secure the lowest possible pressure drop for each application. For critical applications such as servo or proportional controls, a no bypass high strength element combination ensures maximum protection.

The low hystereis differential pressure indicator fitted to this series is unrivalled in its performance.

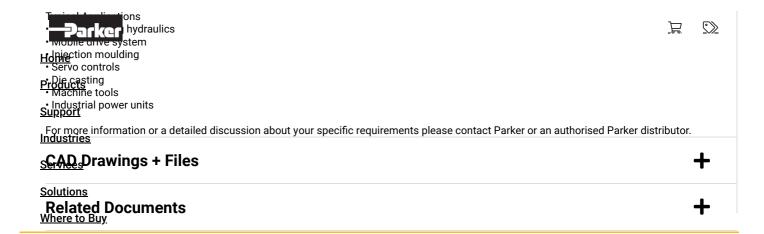



Parker Sales Company UK

psc.uk.webform@support.parker.com
+44 (0)1926 317878

+	Com	pany	Information
---	-----	------	-------------

- + Global Operations
- + Help & Support
- + Follow Us:

© PARKER HANNIFIN CORP 2024

ENGINEERING YOUR SUCCESS.

SITE MAP SAFETY PRIVACY POLICIES TERMS AND CONDITIONS





<u>Home</u>

Products

<u>Support</u>

Industries

<u>Services</u>

Solutions

Where to Buy