

## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

**Creation Date:** 17-12-2018

**Datasheet No:** DS433W


**Parker Part No:** 931020Q

**OEM:** Pall

**OEM Part No:** HC9700FKT18H&Z

### Product Dimensions

<b>A (mm)</b>	99.0	<b>(inch)</b>	3.90
<b>B (mm)</b>	42.0	<b>(inch)</b>	1.65
<b>C (mm)</b>	42.0	<b>(inch)</b>	1.65
<b>D (mm)</b>	99.0	<b>(inch)</b>	3.90
<b>E (mm)</b>	470.0	<b>(inch)</b>	18.50

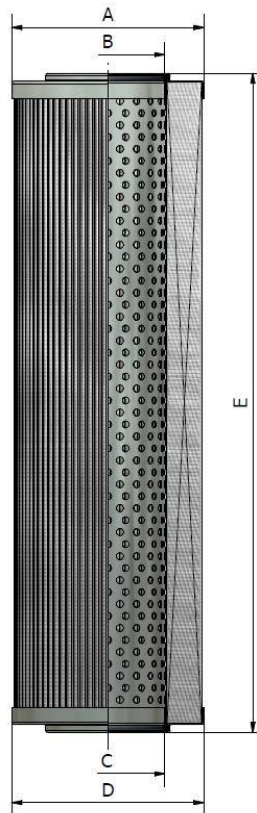

### Construction Materials

<b>Seal(s):</b>	FPM: Fluoroelastomer
<b>Top Endcap:</b>	Glass reinforced nylon
<b>Bottom Endcap:</b>	Glass reinforced nylon
<b>Inner Support Cylinder:</b>	Mild steel tin plated
<b>Filter Media:</b>	Multilayer fibreglass with coated mesh on both sides

### Calculated Performance Criteria

<b>Differential Pressure (<math>\Delta p</math>):</b>	0.00 bar @ 0 l/min
<b>Tested to ISO3968 @ 32 cSt</b>	0.00 psi @ 0.00 gpm

**Efficiency:** >Beta 200 @ 20 microns & greater  
>Beta 1000 @ 22 microns & greater

<b>Minimum Collapse Pressure:</b>	>10 bar
<b>Tested to ISO2941</b>	>145 psi

### Dirt Holding Capacity acc. to ISO16889

0.0 gram @ 0 bar terminal pressure drop  
0.0 gram @ 0 psi terminal pressure drop